INNOVATIONS®

THANK YOU for your purchase of Innovations! Below are our hanging instructions, intended to help you accomplish a beautiful installation. Before proceeding with your installation, check your material and packing slip to ensure you've received your order in entirety. Also check for signs of defects prior to installation of material. If at any time you have questions regarding your installation, please call our offices at 800.227.8053.

Please note that Innovations is unable to entertain product claims after three (3) panels have been hung or if material is cut and glued in excess of three (3) drops.

Pattern: Dynasty
Recommended Primer: Pigmented Acrylic Wallcovering Specific Primer
Recommended Adhesive: Non-strippable, heavy duty, clear wallcovering adhesive
Recommended Wall Surface: Level 4 sheetrock finish or similar
Seams/Paneling Visibility: Visible paneling with noticeable shading may present itself, especially in darker colors, taller walls, and certain lighting environments.
Hanging Directionality: Straight Hang
Pattern Matching: Side-Match
Trimming/Hanging Method: Table trimmed; butted on the wall.
Recommended Smoother/Roller: Soft Bristle Brush and Soft Roller
Wrapping Corners: You cannot wrap corners with this material. When handling corners during an install, we recommend butting the material at the corner.

1. Begin installation by inspecting the material you have received. Ensure all material is visually defect free and matches packing slip.
2. Using correct wallcovering primer, apply primer to destination wall and allow primer to dry.
    a. Always make sure your installation location is properly climate controlled.
3. Apply paste to backing of material using an adhesive roller. Avoid oversoaking and ensure even application. DO NOT USE a pasting machine as it will add too much water content to paste.
4. Once material has properly been booked to ensure proper level of tack, apply material to the primed wall.
    a. Hang material in sequence as it comes off the roll, including short drops around windows, doors, and other obstructions on your wall.
5. DO NOT get adhesive on the face of material. Adhesive is very difficult to clean and next to impossible to remove after it is dry without potentially damaging the wallcovering face. Dried adhesive also tends to leave a hazy appearance.
    a. To avoid getting adhesive on the face of material, we recommend using a low-adhesive safe-release painter's tape on the seams to keep the product face clean.
6. When trimming this product, we advise you to use a new razor blade with each cut. A dull razor blade is the primary cause of fraying and unsightly seams. DO NOT USE a seam buster.

Pattern Notes

- Dynasty has a H: 36" V: 7 1/4" repeat that is intended to be side matched. See pattern diagram below.
- Like all naturally woven items, the sisal fibers in this product may display slight irregularities, including but not limited to color variation and weave consistency. These variations are not considered defects and are part of their intrinsic beauty.
- Due to the nature of the product, paneling is to be expected and shading will be noticeable. Shading will appear more prominent in darker colors, taller walls and certain lighting environments. It is advisable to cut and layout all drops prior to installation to panel material properly.

INNOVATIONS®

Pattern Repeat Diagram

DYNASTY

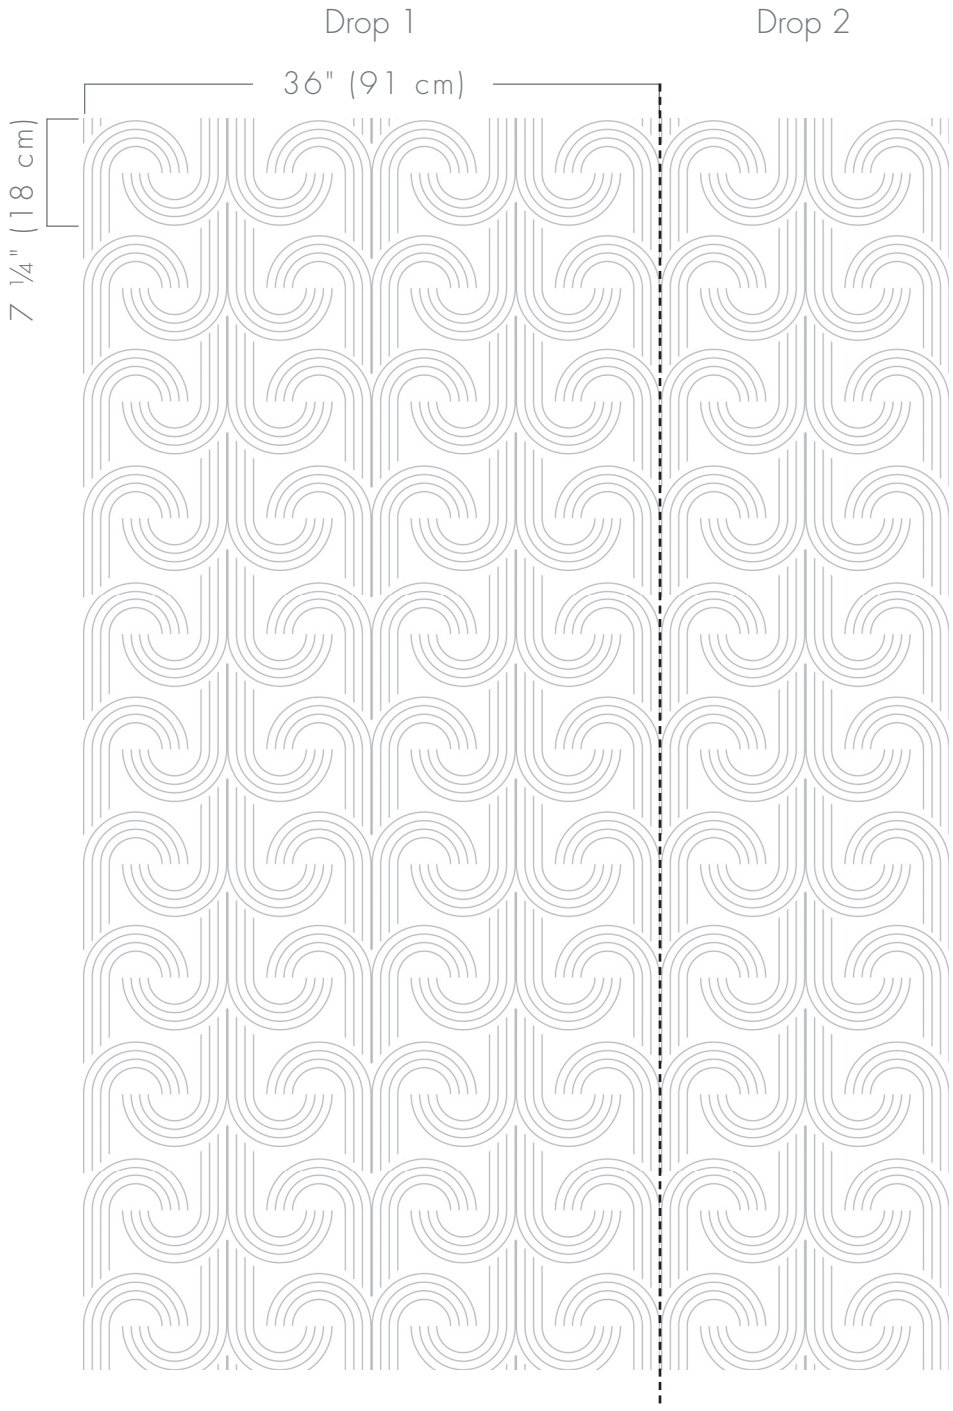

150 Varick Street New York, NY 10013 | t. 800.227.8053 | f. 212.807.1944 | innovationsusa.com